


IV-Stand for Urology

Material: stainless steel

I-U02224

PRODUCT DESCRIPTION

Field of application	Urology
Material	Stainless steel
Bottle Holder	Stainless steel, for screw-in
Number of hooks	4
Arrangement of the hooks	90° to each other
Type of height adjustment	Screw height adjustment
Maximum length/height	2,800
Minimum length/height	1,900
Inner tube diameter	Ø 25 mm
Outer tube diameter	Ø 33,7 mm
Length of outer tube	1,600
Base leg profile	45 x 25 mm
Base diameter	Ø 800 mm
Castors	Twin castors
Castor diameter	Ø 75 mm
Number of castors	5 with brakes and elect. conductivity
Total load capacity (kg)	28
Load capacity per system (kg)	20
Load capacity per hook (kg)	5

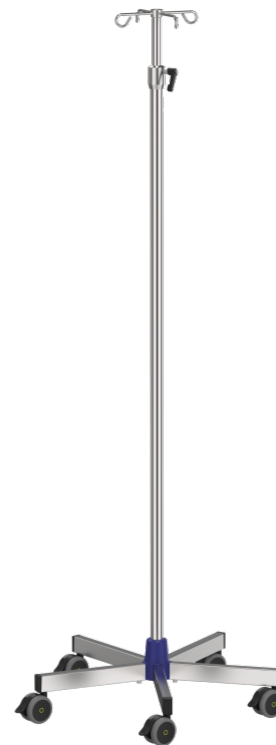

PACKAGING UNIT: UNIT

Width Box1	0,22 m
Height Box1	0,13 m
Length Box1	1,78 m
Weight Box1	13,7 kg



Softdrop system
for maximum security



Conductivity
for medical devices



I-U02224

IV-Stand for Urology



Technology

All plastic parts are lightfast

Stainless steel tubes
according to DIN EN 10217-7

Material ultrasonic and eddy
current tested (according to
EN 10246-9/3)

The integrated pull-out
limiter prevents the
adjustable tubes from
separating

Safety bottle cross
according to DIN ISO 15375

higher build up pressure of
washing agent through ext.
length 2.800 mm

great running characteristic
through high value 80 mm
Mono castors

Reinforced bottle holder
allows hanging 5 liters of
rinsing solutions



Safety

The base legs are sealed
with plastic plugs (no risk of
injury)

Low risk of pinching when
retracting and extending the
IV-pole thanks to the built-in
safety distance

The Softdrop system
dampens and controls the
lowering of the inner tube

an integrated base-weights
facilitates a safer attachment
of various pumps and other
medical equipment

No risk of injury thanks to
the rounded shape of the
bottle hooks

The geometry of the hooks
prevents the infusion bottle
from falling out

