


# Series 6: LED Tube Reading Lamp

## short version, silver

L600025S

### PRODUCT DESCRIPTION

total luminous flux	220 lm
Types of arm	Gooseneck arm, short version
Colour of lamp	Silver
Light output	? 2.000 Lux / 500 mm
Luminous flux (lm)	53 lm/W at 100 mA
Light colour	5.000 K
Life expectancy	> 25.000 h
Electrical mains	AC 100 - 240 V, 50 - 60 Hz
Electrical load	2,1 W
Supply voltage of Lamp	12 V (DC)
Spigot diameter	18 mm
Angle of lamp head rotation	315°
Angle of reflected light	30°
Optional	international plug / link-up to bed controls / operated through bed controls by the patient

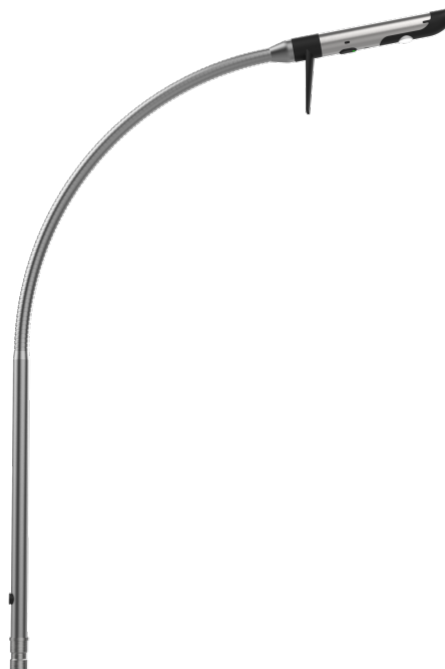

### PACKAGING UNIT: UNIT

Width Box1	0,11 m
Height Box1	0,08 m
Length Box1	1,12 m
Weight Box1	1,2 kg



Energy efficient  
modern and economical LED technology




Best hygienic properties  
smooth surface, small gaps and joints



L600025S

## Series 6: LED Tube Reading Lamp



### Area of application

optimal hygienic characteristics (wipe disinfection)



### Economy

high life expectancy of the light source

low maintenance effort



### Safety

protected interior cable management

